

## **Technical Data**

**April 2018** 

Engine	Alternator	Generator	Model
Cummins KTA19-G8	Leroy-Somer LSA 49.3 S4A	FB650E-C / Open	FC650E-C / Silent


50Hz/1500rpm	3-Phase	Power Factor	Emissions
30H2/1300IpIII	3-Filase	Factor Cos Φ = 0.8	N/A

RATINGS	Prime F	ower	Standby	y Power	Standby Current	Fuel Consumption @100% Load		
	(PR	P)	(E	SP)	Amps			
Voltage (V)	kWe	kWe kVA		kVA	(A)	L/h		
380/220	N/A	N/A N/A 520 650		987.6	144.0			
400/230	N/A	N/A	520	650	938.2	144.0		
415/240	N/A	N/A	520	650	904.3	144.0		



### Key Features:

- High efficient water cooled diesel engine.
- Single bearing with brushless alternators (Class H, with AVR).
- Radiator with pressure cap and drain point.
- Fully guarded engine-driven fan.
- Fully welded steel skid base with lifting holes and fork lift legs.
- Integral fuel tank with filler cap and gauge (≤650kVA).
- Heavy duty rubber anti-vibration mountings.
- 12V or 24V maintenance free starter battery and connecting cables.
- Separate engine-driven battery charging alternator.
- Spin on oil and fuel filters and dry type air filter element.
- Industrial silencer (15dBA reduction) supplied loose.
- Auto start control system with LCD show.
- Battery charger provided.
- Main line 3P circuit breaker.
- Rigorous factory test wiring with IEC standard.
- Operation & Maintenance manual & Wiring diagrams.
- Wide range of optional extra features available.

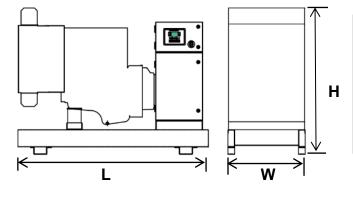

Overall Dimensions	& Weights - Open Se	et
Length (L)-mm:	3500	
Width (W)-mm:	1550	
Height (H)-mm:	2200	
Dry Weight-kg:	4300	

Ratings: All three phase generator sets are rated at 0.8 power factor. All single-phase generator sets are rated at 0.8 or 1.0 power factor. Prime Power: Available continuously at variable load in lieu of commercially purchased power for an unlimited number of hours per year accordance with ISO8528-1, and an overload of 10% permitted for one hour in every twelve hours of operation in accordance with ISO 3046-1. Standby Power: Emergency Standby Power in variable load applications in accordance with ISO8528-1 in the event of a utility power failure. No overload available for this service as relevant alternators are peak continuous rated at 27 °C. TIDE Power reserves the right to change the design or specifications without notice and without any obligation or liability.

Engine		11.22		mmins KTA19-G					
	<b>I</b> -	Units	Prime	Standby					
	Frequency	Hz	50						
	Engine Speed	r/min	1500						
	Cylinders / Type		6 cyl / In-line / 4-stroke						
	Aspiration		Turbocharge, Afte						
General	Governor Type		Electronic Gove	ernor					
Performance	Bore / Stroke	mm	159/159						
	Displacement	Litres	19						
	Compression Ratio		13.9:1						
	Piston Speed	m/s	7.9						
	Brake Mean Effective Pressure	kPa	N/A	2424					
	Engine Power	kWm	N/A	575					
	Fuel Consumption at 110% Standby Power	Litres/hour	144						
	Fuel Consumption at 100% Standby Power	Litres/hour	N/A						
	Fuel Consumption at 75% Standby Power	Litres/hour	N/A						
Fuel System	Fuel Consumption at 50% Standby Power	Litres/hour	N/A						
		Litres/hour	N/A						
		Hours / Litres	8 / 1150						
	•	kPa	3.73						
Air System		kPa	6.23						
		Litres/s	N/A	772					
		kPa	10						
Exhaust		mm	127						
System		Litres/sec.	N/A	1975					
,		°C	N/A	571					
		Litres	50	<u> </u>					
		Litres	32.2						
Oil System		Litres	37.9						
	• • •	°C	121						
		Litres	112						
Cooling		°C	82-93						
System	Displacement Compression Ratio Piston Speed Brake Mean Effective Pressure Engine Power Fuel Consumption at 110% Standby Power Fuel Consumption at 100% Standby Power Fuel Consumption at 50% Standby Power Fuel Consumption at 55% Standby Power Fuel Consumption at 25% Standby Power Fuel Consumption at 25% Standby Power Standard Fuel Tank Capacity  Maximum Intake Air Restriction with Heavy D - With Clean Filter Element - With Dirty Filter Element Intake Air Flow  Maximum Back Pressure Exhaust Gas Flow Exhaust Gas Temperature  Total Oil System Capacity Oil Pan Capacity - Low Oil Pan Capacity - High Maximum Oil Temperature  Coolant Capacity - With Radiator Standard Thermostat (Modulating) Range Maximum Allowable Top Tank Temperature Electrical System Voltage Battery Connecting Cables Radiated Heat to Ambient Heat Rejection to Coolant			104					
		°C V	100	104					
Electric		V	24 Maintenance-i	froo					
System				iiee					
		130/	Auailable	0.0					
Energy		kW	N/A	82					
Balance	•	kW	N/A	411					
	Heat Rejection to Exhaust	kW	N/A	N/A					

		Units	
	Manufacture / Brand		Leroy-Somer
	Model		LSA 49.3 S4A
	Coupling / No. of Bearings		Direct / Single Bearing
	Phase / Poles		3-Phase / 4-Pole
	Power Factor		Cos Φ = 0.8
General Data	AVR Regulation		Yes
General Data	Voltage Regulation		± 0,5 %
	Insulation Class		Н
	Drip Proof		IP23
	Excitation		AREP
	Altitude	m	≤1000
	Overspeed	min <sup>-1</sup>	2250

Controller Model / ComAp	EC 2.0 /	EC 3.0 /	EC 4.0 /	EC 5.0 /	
	Nano Plus	AMF20	AMF25	IG-NT	
	httd:Manol" many	InteliLite" AMF 20 ConAp	IntellLite® AUF 25 ComAp	InteliGen"	
Controller Photos					
			* ** ** ** ** ** ** ** ** ** ** ** ** *		
Standard Supply	×	•	0	0	
/iewable Parameters					
Phase Voltage	×	3	3	3	
Current	Instrumentation	•	•	•	
requency	•	•	•	•	
Active Power	×	•	•	•	
Reactive Power	×	•	•	•	
Apparent Power	×	•	•	•	
Power Factor	×	•	•	•	
Electric Energy Metering	X	•	•	•	
Generator Protection					
Abnormal Voltage	•	•	•	•	
Over-current Warning	×	•	•	•	
Over current Protection	•	•	•	•	
Over Frequency Protection	•	•	•	•	
Short Circuit Protection	MCCB / ●	MCCB / ●	MCCB / ●	MCCB / ●	
Engine Figure					
Oil Pressure	•	•	•	•	
Vater Temperature	•	•	•	•	
Fuel Meter / Fuel Sensor	●/○	•/0	●/○	●/○	
Speed	•	•	•	•	
Battery Voltage	•	•	•	•	
Elapsed Time	•	•	•	•	
Engine Protection					
Low Oil Pressure Warning	×	•	•	•	
Low Oil Pressure Protection	•	•	•	•	
ligh Temperature Warning	×	•	•	•	
High Temperature Protection	•	•	•	•	
Overspeed Warning	×	•	•	•	
Overspeed Protection	×	•	•	•	
Alternator Charger	•	•	•	•	
Functions					
Remote Start	•	•	•	•	
AMF (Auto Main Failure)	•	•	•	•	
Programmable Intput	•	•	•	•	
Programmable Output	•	•	•	•	
expand Module	×	0	0	0	
Communication Function	×	0	0	●/ RS232 / 485	
Communication Port	USB	0	0	RS232 / 485	
CAN	•	×	•	•	
Service Indicate	X	×	•	•	
ault History	•	•	•	•	
Gen-Gen Synchronising	×	×	×	•	

Tide Power Technology Co., Ltd.NO.1 Building, YiXu Mechanical & Electrical Park, Gaishan Town, Cangshan District, Fuzhou, Fujian, China.Our Tel: +86-591-28068999, Fax: +86-591-28068900Email: sales @tpshk.comwww.tpshk.com

O Available as Optional

Remark:

Standard Supply

x Not Available

"Ensure a quieter life with our sound attenuation system." Features:

#### Extremely Rugged & Highly Corrosion Resistant Construction

- Body made from 2.0mm sheet steel components with powder coating
- 6-8 hours built-in fuel tank integrated into the skid-mount base
- Excellent design and craftmanship
- Compact structure and longer service life
- Residential silcencer to made sure the sound level.
- Zinc alloy with black powder coated locks and hinges and proven to withstand corrosive conditions.

# Q TITO POWER

#### Easy Commissioning and Maintenance

- Separate & Standing control room at end side, easy reachable electrical power connections board.
- Side doors allowing 180° opening rotation .
- Radiator fill access through cover in canopy roof.
- Lube oil drain and radiator drain.
- Manual lube oil pump provided.


#### Security and Safety

- Earth leakage protection.
- 40-50mm non-inflammable sponge inside.
- Control panel viewing window in a lockable access door.
- Emergency stop button mounted on canopy exterior.
- Fuel fill and battery can only be reached via lockable access doors.
- Exhaust silencing system enclosed for operator safety
- Efficient management of cooling air to avoid high water temperature, reliable operation under harshest conditions.



#### Transportability

- Lifting points on top to move genset easily.
- Fork lift legs provided and easy to loose to fix the genset.

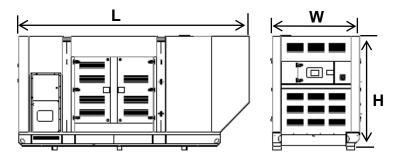

Overall Dimensions & Weight & Noice										
Dimensions	Dimensions Weight Noice Level									
( L x W x H ) mm	kg	dB(A) at 7m	Hours	Litres						
5200x1900x2250	6300	65-78	5	860						

Tide Power offers not only a changeover switch but also an integrated mains detection and switch system for your 24 Hour Power Protection. The system enables automatic start-up and operation of the generating set in the event of a mains power failure, overvoltage or loss of a mains automatic re-transfer once it come back.

#### System Advantages

- Automatically transfer and re-transfer load from main power to gen-power without operator intervention.operation (Both automatic and manual).
- ATS Controller (AMF function), seamless integration with AMF25
- Available from 32 4000A, better protection for 4 pole switch.
- Available in standard, bypass isolation and service-entrance configurations.
- Configurable in open, closed and programmed transition operating modes.
- Designed to interface seamlessly with TIDE POWER generators and switchgear.
- Drip proof IP42 enclosure.
- · Easy installation: wall-mounted & floor standing
- Comes fully loaded with the technology to do the job.

#### 50/60 Hz, 32-4000 Amps

Rated Current	Amps	32	63	80	100	125	160	200	250	300	315	400	630	800	1000	1250	1600	2000	2500	3200	4000A
	Chinese	×	Α	×	Α	×	В	×	С	×	×	С	С	D	D	D	D	Е	E	E	×
Breaker Type	ABB	В	В	×	В	В	В	В	В	×	С	С	D	D	D	D	D	E	E	×	×
	Socomec	×	В	В	В	В	В	×	В	×	×	С	D	D	D	D	Е	E	E	Е	Е

Dimensions: mm

A: 400×200×500

Genset:

B: 500×300×650

C: 600×400×1200

D: 800×600×1400

E: 1000×800×1600

### Optionals (All depends)

## Materials & Miscellaneous

- Ÿ Marine class painting and other special painting
- Ÿ Standard accoustic enclosure genset
- Ÿ Extended warranty
- Ÿ Extended factory test
- Ÿ Additional sensors
- Ÿ Off road trailer type
- Ÿ Standard ATS
- Ÿ Mounted fire extinguisher
- Ÿ Additional vibration isolation
- Ÿ Wooden case packaging
- Ÿ Tide Power tool kit
- Ÿ Additional operation manual
- Ÿ Nylon canvas wrapped packaging
- Yon shelf for double stack shipping
- Ÿ Water jacket heater
- Additional CE features selection.

#### **Custom-Made solutions**

#### Genset:

#### **Materials & Miscellaneous**

- Ön road trailer (EU) type
- Ÿ Rental type genset
- Ÿ Mining type genset
- Ÿ Marine type genset
- Ÿ High temp. Radiator for silenttype genset
- Ÿ EPA series gensets

#### Optionals (All depends)

#### **Custom-Made solutions**

### Diesel Engine/ Baseframe Mounted Accessories:

# **Cooling System**

- Ÿ Engine heat guards
- Ÿ Low coolant level alarm & shutdown (Depends on engine series)
- Ÿ High temp. & Anti-erosion radiator upgrade for open type genset
- Ÿ 50% antifreeze @-36°C

# **Cooling System**

Ÿ Anti-erosion radiator for silent type genset

Diesel Engine/ Baseframe Mounted Accessories:

- Ÿ Remote radiator with heat exchanger
- Ÿ Remote cooling tower with heat exchanger

#### **Filters**

- Ÿ Extra air filters for time-maintenance
- Double heavy duty air filters
- Ÿ Extra fuel filters for time-maintenance
- Ÿ Extra oil filters for time-maintenance

### **Filters**

- Mounted heavy duty air filter

#### **Exhaust**

- Ÿ Residential silencer for open type genset
- Ÿ Stainless steel silencer and kits
- Heat protection guard

#### **Exhaust**

Ÿ Mounted heavy duty air filter

#### Fuel & Oil

- Ÿ Separated / External fuel tank
- Ÿ Water fuel separator
- Ÿ 3 way fuel valve
- Ÿ Manual bypass valve
- Ÿ Lub oil make up tank
- Yub oil drain pump
- Ÿ Fuel level sensor
- Ÿ Fuel cooler
- Ÿ Automatic remote fuel supply with fuel level switch
  - & low fuel level alarmshutdown.
- Coolant heater 220/240V
- Ÿ Lub-oil heater for severe cold weather

#### Fuel & Oil

- Bulk base fuel tank
- Bunded base fuel tank

#### Starting & Charging

- Ÿ Bulk starting battery -17°C below
- Ÿ Battery removal switch
- Ÿ Battery heater

#### Starting & Charging

Ÿ None

#### Control System & Power Termination:

## **Control System & Breakers**

- Ÿ Different functional modules with
- Tide Easycon refer to other table
- Ÿ Mounted audible and visable llighting
- Ÿ Control panel cover (80kva or below)
- Ÿ Motorized circuit breaker 3 Poles
- Ÿ Motorized circuit breaker 4 Poles
- Ÿ ACB 3 Poles
- Ÿ MCCB 4 poles
- Ÿ Different breaker brands, like ABB etc
- Ÿ Leakage protection switch

Control System & Power Termination:

#### **Control System & Breakers**

- Ÿarious standard sockets mounted outside the enclosure

#### Optionals (All depends)

#### **Custom-Made solutions**

Brushless Alternator:

#### Brushless Alternator:

## Ÿ 12 Lead stator (change voltage depends)

- Miterchangeable S.A.E flanges and drive discs
- Ÿ Convenient filters on air inlets and outlets
- Ÿ Coastal type [] Alternator painting color Ÿ.M.G or auxiliary
- Ÿ AREP for Leroy-Somer only
- Ÿ Shunt trip
- Ÿ Exterior potentiometer
- Ÿ Auxiliary contacts and double bearing
- Änti-condensation heater
- Ÿ Stator thermal protection
- Ÿ Quadrature droop kits

#### Enclosure & Canopy:

- Super silent enclosure
- Ÿ Weather proof enclosure
- Flat sponge sound absorber enclosure

Weather protective & Sound proof

- Forous sheet with rockwool sound absorber enclosure

- Ÿemperature rise class F Marine type alternator P upgrade MV

#### Enclosure & Canopy:

#### Weather protective & Sound proof

- ŸR series
- ISO 20ft containerized
- Ÿ ISO 40ft containerized
- Stainless steel locks and hinges

Please refer to Tide Power sales department for full details of the above options.

#### Warranty

Tide Power distributor, dealer, or authorized representative performs startup within 6 months of the date of shipment from the factory, warranty coverage will begin on the startup date (Register the startup date to Tide with in 6 month is essential and can be enforced). This warranty does not apply to malfunctions caused by damages, unreasonable use, misuse, repair or service by unauthorized persons, or normal wear and tear.

#### **Warranty Coverage**

Generators used to commercial utility source: One (1) year or 1000 hours (whichever occurs first) from date of shipment from the factory or registered startup date.